

ELYX-10A Wireless PowerTransfer Solution



1 Tx control module 2 Tx coil module 3 Rx coil module 4 Rx control module

FEATURE

- High distance charging range / Robust to misalignment
- Maximum 800W transmitting power
- 3 types of receivers Max 290W (24V-10 A), Max 420W (36V-10 A), Max 536W (48V-10 A)
- Protection: over voltage / over current / over temperature / Foreign Object Detection (FOD)
- High End-to-End Efficiency (DC-to-Battery) (Max. 88%)
- Pre-Charge / Full-Charge Function (User Setup)
- Compatible with wired charging and wireless charging
- Cloud Server Monitoring & Power Management / [Eta-PMS \(eta-on-pms.com\)](http://eta-on-pms.com)

Eta Electronics contact@etaelec.com

HQ 38542 2514, Globalventure-dong, Gyeongbuktechnopark, 27, Sampung-ro, Gyeongsan-si, Gyeongsangbuk-do

R&D 04314 6F, 271, Wonhyo-ro, Yongsan-gu, Seoul

SYSTEM COMPONENTS

- Transmitter (DT-10A)
 - Transmitter control module
 - Transmitter coil module

- Receiver (DR-10A-24, DR-10A-36, DR-10A-48)
 - Receiver control module
 - Receiver coil module

- Option 1. Tx/Rx Cable length (30, 50, 100 cm)
- Option 2. Server communication (Wi-Fi, LTE)

VERSION

- Version 1.1 Dec. 2023

SPECIFICATION

TOTAL SYSTEM		
CHARGING CHARACTERISTIC	FREQUENCY	79 ~ 90 kHz
	EFFICIENCY (Max.)	88 % (DC to Battery)
	CHARGE BATTERY	Li-ion battery (7, 10, 13 series pack)
	CHARGE MODE	CC/CV
	CHARGE RANGE	0 ~ 50 mm distance (z-axis) offset (15~40 mm Optimal distance) Max. ± 70 mm x-axis offset Max. ± 40 mm y-axis offset
COMMUNICATION	Server	Wi-Fi or LTE
	Application	CAN / UART
ENVIRONMENT	AMBIENTTEMP.	- 15 ~ 45°C


TRANSMITTER		DT-10A
INPUT	ACVOLTAGE	220 VAC
	CURRENT (MAX.)	4 A
DIMENSION	CONTROL MODULE SIZE	300 mm X 254 mm X 59 mm (3,410 g)
	COIL MODULE SIZE	304.5 mm X 185 mm X 28 mm (1,490 g)
PROTECTION	OVER CURRENT	Power amp. Protection
	Foreign Object Detection	Conductive material sensing & shut down

RECEIVER		DR-10A-24	DR-10A-36	DR-10A-48
OUTPUT	VOLTAGE RANGE	15 – 29 V	25 – 42 V	38 – 53.6 V
	CHARGE CURRENT (MAX)	10 A	10 A	10 A
	CHARGE POWER (MAX)	290 W	420 W	536 W
DIMENSION	CONTROL MODULE SIZE	198 mm X 103 mm X 47 mm (630 g)		
	COIL MODULE SIZE	202.5 mm x 135.12 mm X 28 mm (790 g)		
PROTECTION	OVERVOLTAGE	105 % rated voltage of full charged battery		
	OVER CURRENT	120 % rated output current		

Eta Electronics contact@etaelec.com

HQ 38542 2514, Globalventure-dong, Gyeongbuktechnopark, 27, Sampung-ro, Gyeongsan-si, Gyeongsangbuk-do


R&D 04314 6F, 271, Wonhyo-ro, Yongsan-gu, Seoul

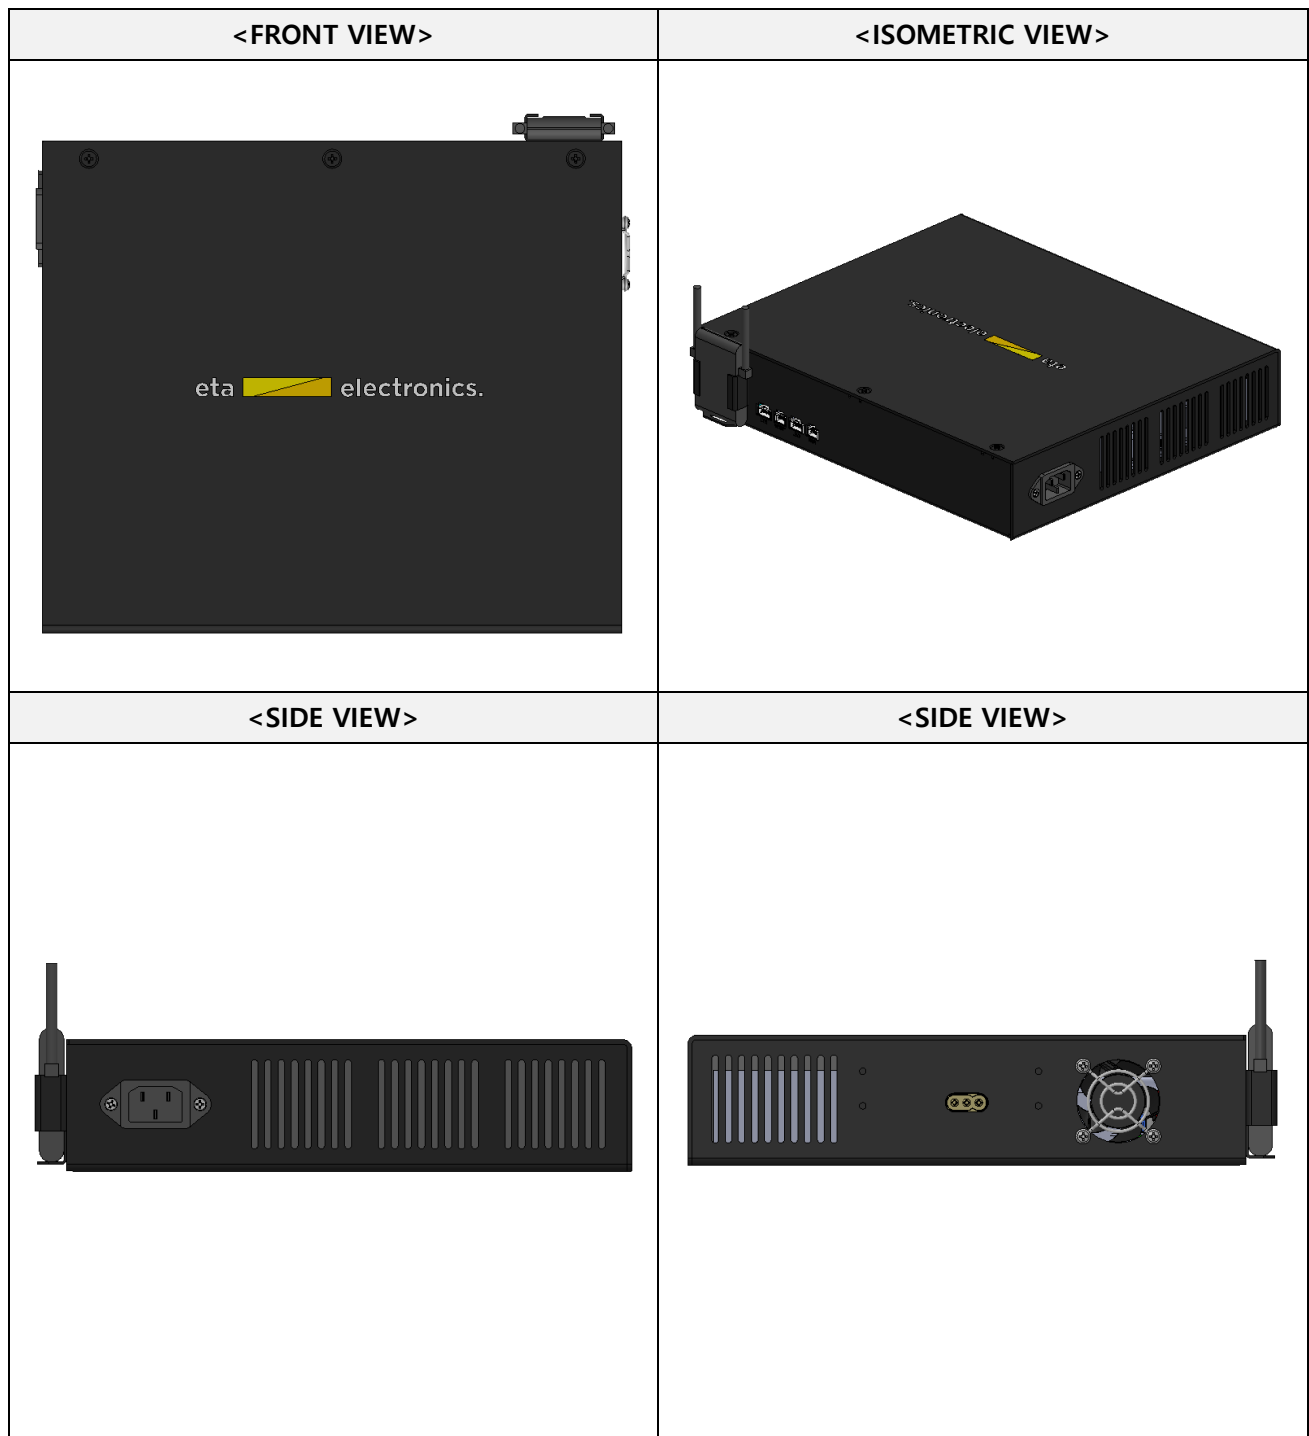TRANSMITTER CONTROL MODULE

Eta Electronics contact@etaelec.com

HQ 38542 2514, Globalventure-dong, Gyeongbuktechnopark, 27, Sampung-ro, Gyeongsan-si, Gyeongsangbuk-do


R&D 04314 6F, 271, Wonhyo-ro, Yongsan-gu, Seoul

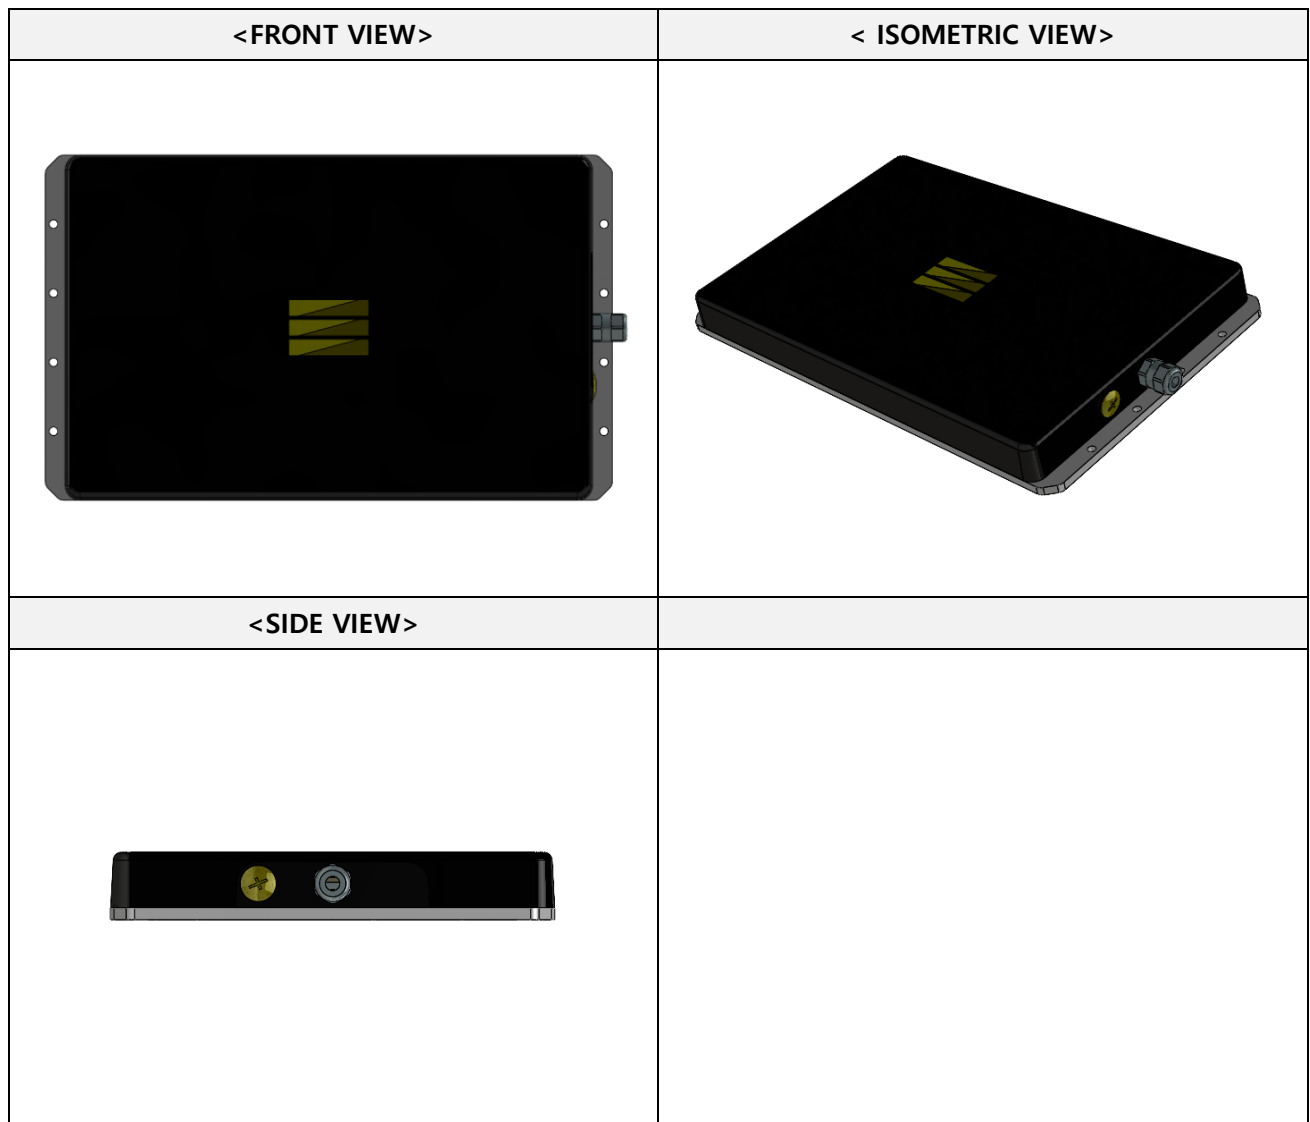TRANSMITTER COIL MODULE

Eta Electronics contact@etaelec.com

HQ 38542 2514, Globalventure-dong, Gyeongbuktechnopark, 27, Sampung-ro, Gyeongsan-si, Gyeongsangbuk-do

R&D 04314 6F, 271, Wonhyo-ro, Yongsan-gu, Seoul

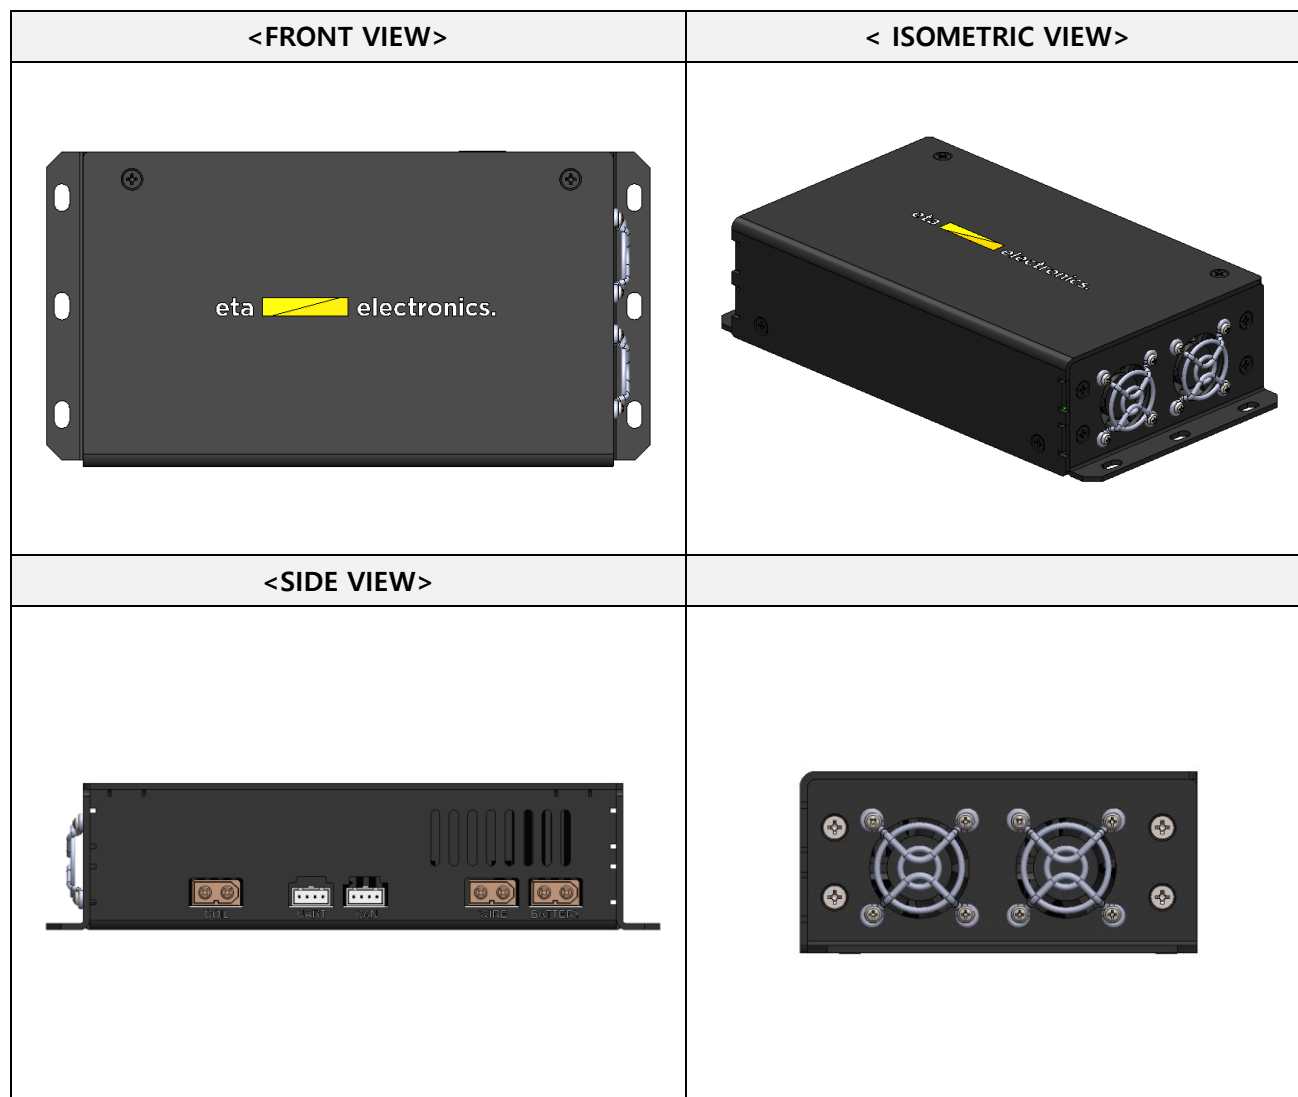RECEIVER CONTROL MODULE

Eta Electronics contact@etaelec.com

HQ 38542 2514, Globalventure-dong, Gyeongbuktechnopark, 27, Sampung-ro, Gyeongsan-si, Gyeongsangbuk-do

R&D 04314 6F, 271, Wonhyo-ro, Yongsan-gu, Seoul

RECEIVER COIL MODULE

<FRONT VIEW>	< ISOMETRIC VIEW>
	
<SIDE VIEW>	
	


Eta Electronics contact@etaelec.com

HQ 38542 2514, Globalventure-dong, Gyeongbuktechnopark, 27, Sampung-ro, Gyeongsan-si, Gyeongsangbuk-do


R&D 04314 6F, 271, Wonhyo-ro, Yongsan-gu, Seoul

INSTALLATION GUIDE

Tx Coil Module

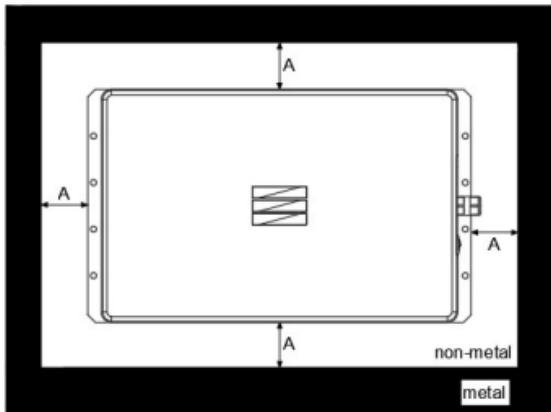

Rx Coil Module

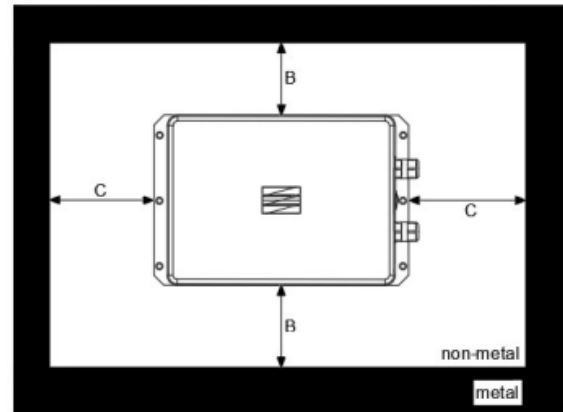

(mm)	A	B	C	D	E
Tx Coil Module	35**			*Al : 0	
				20	
Rx Coil Module		60**	120**		*Al : 0
					20

***Al : Aluminum**

****This numbers could be changed.**

Eta Electronics contact@etaelec.com










HQ 38542 2514, Globalventure-dong, Gyeongbuktechnopark, 27, Sampung-ro, Gyeongsan-si, Gyeongsangbuk-do

R&D 04314 6F, 271, Wonhyo-ro, Yongsan-gu, Seoul

I/O CONNECTOR

Tx Control Module

- LED housing/ contact : SMAW250-04 or equivalent
- RESET,WIFI SETTING housing/ contact : SMAW250-03 or equivalent

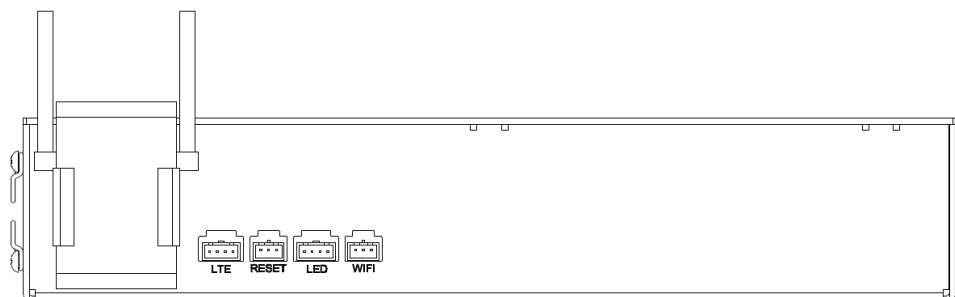

RESET I/O Connector

Pin number	Pin Name	Type	Function
1	RESET	Input	MCU Reset
2	VDD	Output	3.3V Output
3	GND	-	Ground

LED I/O Connector

Pin number	Pin Name	Type	Function
1	Green	Output	Green Light Control Signal
2	Blue	Output	Blue Light Control Signal
3	Red	Output	Red Light Control Signal
4	GND	-	Ground

WIFI Setting I/O Connector

Pin number	Pin Name	Type	Function
1	SET_W	Input	Set the WIFI Configuration
2	VDD	Output	3.3V Output
3	GND	-	Ground


Eta Electronics contact@etaelec.com

HQ 38542 2514, Globalventure-dong, Gyeongbuktechnopark, 27, Sampung-ro, Gyeongsan-si, Gyeongsangbuk-do

R&D 04314 6F, 271, Wonhyo-ro, Yongsan-gu, Seoul

Rx Control Module

- BATTERY, WIRE, COIL output housing/ contact: AMASS XT60E-M or equivalent
- UART, CAN housing/ contact: SMAW250-04 or equivalent

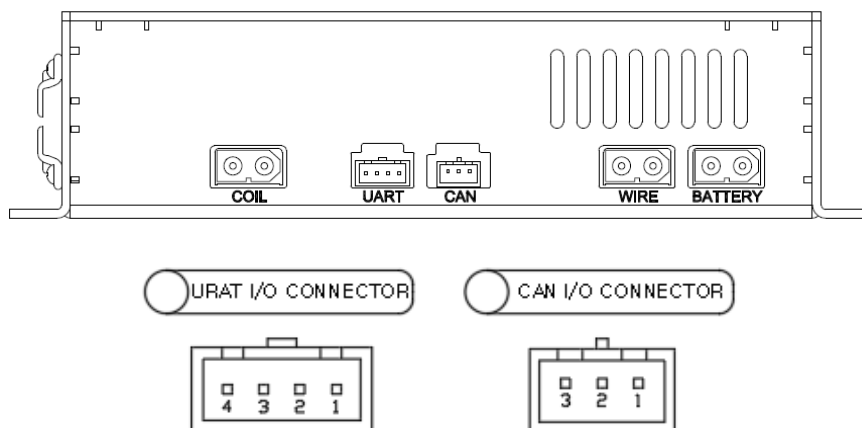

CAN I/O Connector

Pin number	Pin Name	Type	Function
1	GND	Output	Ground
2	CAN_H	Input/Output	High level CAN bus line
3	CAN_L	Input/Output	Low level CAN bus line
4	VDD	Input	5V**

**** (Optional) If 5V is not supplied to pin 4, charging data can be received only during charging time.**

UART I/O Connector

Pin number	Pin Name	Type	Function
1	GND	Output	Ground
2	TXD	Output	UART Transmit Data
3	RXD	Input	UART Receive Data
4	VDD	Input	5V**

**** (Optional) If 5V is not supplied to pin 4, charging data can be received only during charging time.**